




ISO 9001:2015
REGISTERED


ALUMINUM TOMBSTONES READY TO SHIP. FAST. AFFORDABLE. READY TO WORK.

- Lightweight material takes up less of the pallet capacity, leaving more weight available for the workpiece.
- Standardized tombstones available for quicker turnarounds.
- 1/2"-13 grid on a standard 2" spacing include bushings and inserts for precision and thread longevity.
- Proudly produced in the United States for customers worldwide.



MADE IN THE U.S.A.

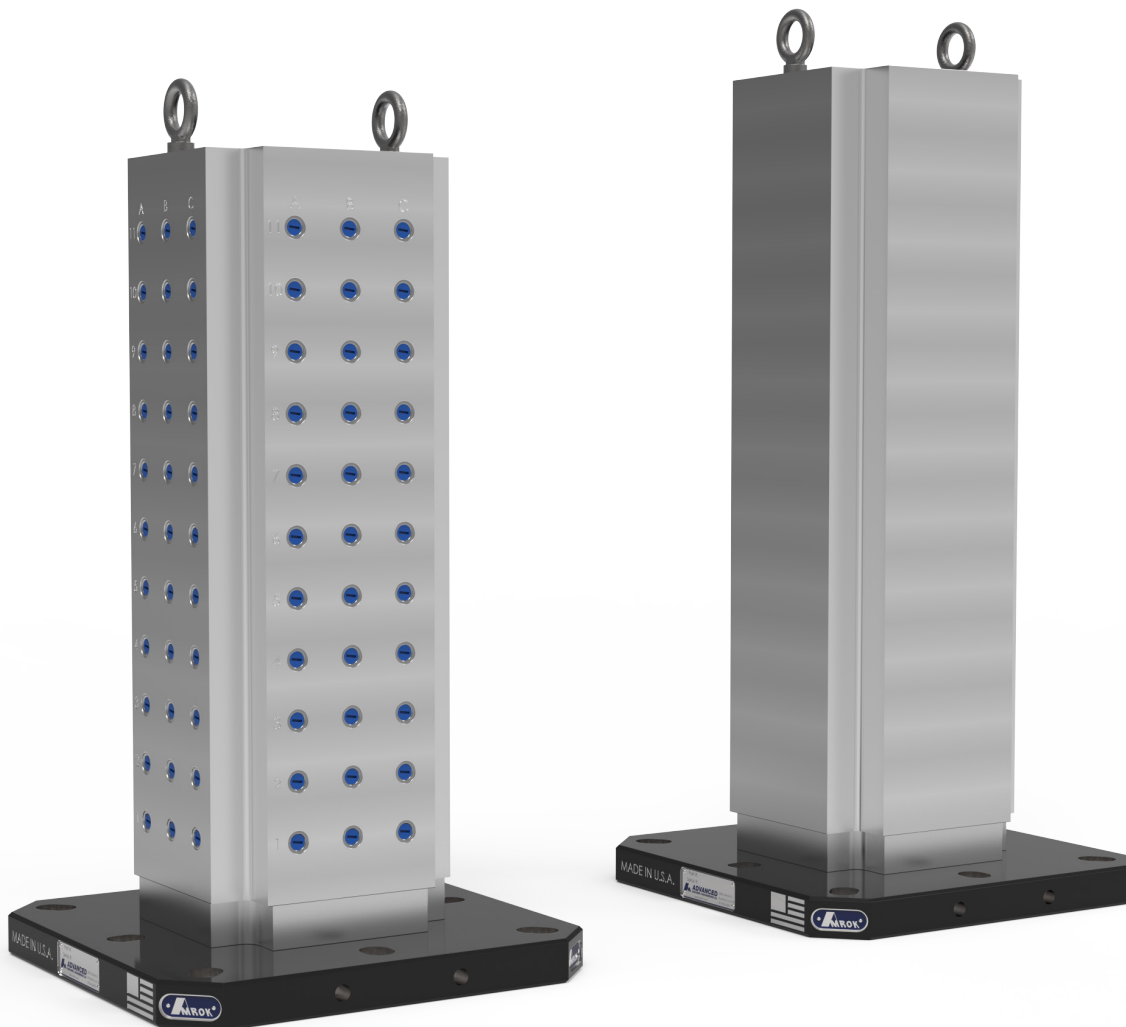

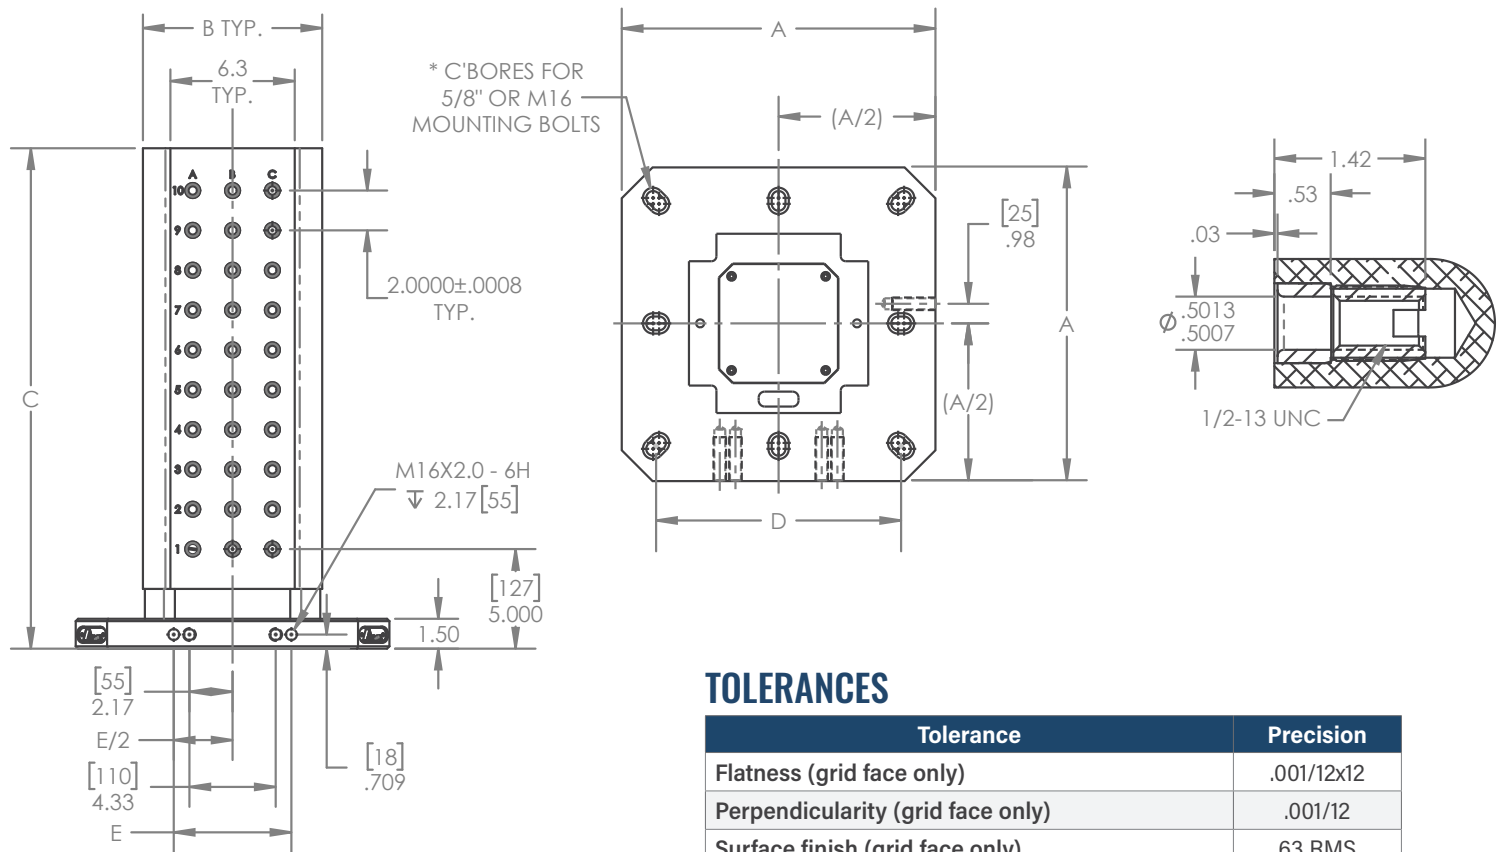

TOLERANCES

Tolerance	Precision
Flatness (grid face only)	.001/12x12
Perpendicularity (grid face only)	.001/12
Surface finish (grid face only)	63 RMS
Precision bushing I.D.	+.0013/+.0007
Bored or precision bushing hole to adjacent hole	±.0008
Bored or precision bushing hole spacing (non accumulative)	0-10 ± .0008, 10-20 ± .0012, 20-30 ± .0015, 30-40 ± .0018

Use AMF-59853 to adapt to 1/2" or m12 bolts

TOMBSTONE DIMENSIONS

Part Number	Dimensions					Weight Aluminum lbs	Grid Style
	A	B	C	D	E		
	in (mm)	in	in	in (mm)	in (mm)		
AMRA-K06060920-16	15.748 (400)	9.21	19.69	12.00(304.8)-12.60(320)	N/A	127	Plain Face
AMRA-K06060928-16	15.748 (400)	9.21	27.56	12.00(304.8)-12.60(320)	N/A	166	Plain Face
AMRA-K06060932-16	15.748 (400)	9.21	31.50	12.00(304.8)-12.60(320)	N/A	186	Plain Face
AMRA-K06060920-20	19.685 (500)	9.21	19.69	15.75(400)-16.00(406.4)	5.91 (150)	147	Plain Face
AMRA-K06060928-20	19.685 (500)	9.21	27.56	15.75(400)-16.00(406.4)	5.91 (150)	186	Plain Face
AMRA-K06060932-20	19.685 (500)	9.21	31.50	15.75(400)-16.00(406.4)	5.91 (150)	206	Plain Face
AMRA-K06060920-16-50	15.748 (400)	9.000	19.69	12.00(304.8)-12.60(320)	N/A	124	UNC 1/2"-13
AMRA-K06060928-16-50	15.748 (400)	9.000	27.56	12.00(304.8)-12.60(320)	N/A	163	UNC 1/2"-13
AMRA-K06060932-16-50	15.748 (400)	9.000	31.50	12.00(304.8)-12.60(320)	N/A	182	UNC 1/2"-13
AMRA-K06060920-20-50	19.685 (500)	9.000	19.69	15.75(400)-16.00(406.4)	5.91 (150)	145	UNC 1/2"-13
AMRA-K06060928-20-50	19.685 (500)	9.000	27.56	15.75(400)-16.00(406.4)	5.91 (150)	183	UNC 1/2"-13
AMRA-K06060932-20-50	19.685 (500)	9.000	31.50	15.75(400)-16.00(406.4)	5.91 (150)	203	UNC 1/2"-13