



|||| HENNIG®

PROTECT YOUR SUCCESS

CHIP & COOLANT MANAGEMENT

**CHIP CONVEYORS | COOLANT FILTRATION | HIGH-PRESSURE COOLANT SYSTEMS
COOLANT TANKS | TURNKEY CHIP MANAGEMENT SYSTEMS | SPARE PARTS**


Safe processes are profitable processes. We make our customers successful by protecting people and machines from the manufacturing environment and waste.

AT HENNIG, YOUR **SUCCESS** ALWAYS COMES FIRST.

Hennig Worldwide has been a global leader since 1950, specializing in chip and coolant management, machine protection, and facility safety. We work with a wide variety of manufacturers and other facilities worldwide, helping them create and maintain safe and efficient workplaces. Our commitment to excellence extends beyond our services—we actively contribute to local communities, create regional jobs, and support the global needs of machine tool customers.

TABLE OF CONTENTS

4	System Types
5	Conveyor Selection Guide
6	Overview, Features, Options
7-10	Chip Conveyors
11-13	Coolant Filtration
14	High-Pressure Coolant Systems
15	Coolant Tanks
16-17	Spare Parts
18-21	Quote Request Forms
22-23	Facilities & Contacts

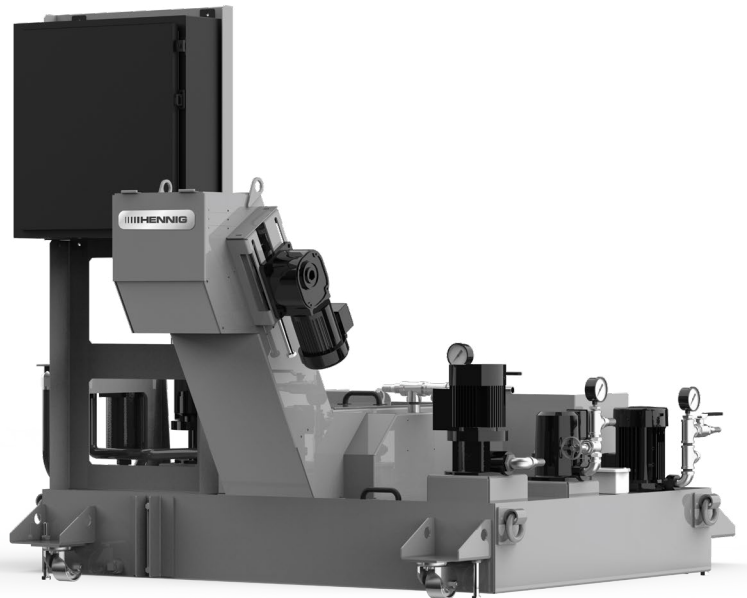



PROTECT YOUR SUCCESS

Our chip and coolant management systems set the standard for removing chips and debris from machine coolant, improving the life of precision machine tools and the accuracy of output. They are supported worldwide with Hennig's global sales and support infrastructure, which includes manufacturing facilities and partnerships throughout the industrialized world.

Our worldwide network leads the industry in developing innovative chip conveyor technologies, offering a complete range of chip conveyor solutions tailored to particular machine types, performance requirements, and work area considerations. Our chip conveyors outperform expectations, even in the most demanding production environments, and they do it more efficiently and with less maintenance than other conveyor solutions.

SYSTEM TYPES

CHIP CONVEYORS




Hinge Belt
Page 7



Scraper Belt
Page 7



Magnetic
Page 8



Push-Pull Bar
Page 8



Belt Type
Page 8



Auger
Page 9



Mobile Conveyor
Page 9



Turnkey/ Network
Page 10

COOLANT FILTRATION



PureFlow
Page 11



Chip-Disc Filtration (CDF)
Page 12-13

HIGH-PRESSURE COOLANT SYSTEMS




VariFlow
Page 14

COOLANT TANKS



Integrated Tanks
Page 15



Auxiliary Tanks
Page 15







CONVEYOR SELECTION GUIDE

CONVEYOR SELECTION GUIDE BY CHIP FORM

Chip Type	Hinge	Scraper	Magnetic	Hinge (CDF)	Scraper (CDF)	Hinge (Pure Flow)	Scraper (Pure Flow)
1.1 Ribbon Long	●	○	●	●	○	●	○
1.2 Ribbon Short	●	●	●	●	●	●	●
1.3 Ribbon Snarled	●	○	●	●	○	●	○
2.1 Tubular Long	●	○	●	●	○	●	○
2.2 Tubular Short	●	●	●	●	●	●	●
2.3 Tubular Snarled	●	○	●	●	○	●	○
3.1 Spiral Flat	●	●	●	●	●	●	●
3.2 Spiral Conical	●	○	●	●	○	●	○
4.1 Washer Helical Long	●	○	●	●	○	●	○
4.2 Washer Helical Short	●	●	●	●	●	●	●
4.3 Washer Helical Snarled	●	○	●	●	○	●	○
5.1 Conical Helical Long	●	○	●	●	○	●	○
5.2 Conical Helical Short	●	●	●	●	●	●	●
5.3 Conical Helical Snarled	●	○	●	●	○	●	○
6.1 Arc Connected	●	○	●	●	○	●	○
6.2 Arc Loose	○	●	●	○	●	○	●
7 Elemental	○	●	●	○	●	○	●
8 Needle	●	●	●	●	●	●	●
9 Fines	○	●	○	○	●	○	●
10 Swarf, Sludge	○	●	○	○	●	○	●
11 Small Parts, Scrap	●	○	●	●	○	●	○

● Good ● Suited under certain conditions ○ Not recommended

CHIP FORM SPECIFICATIONS (*ACCORDING TO ISO 3685)

1* *Ribbon	2* *Tubular	3* *Spiral	4* *Washer helical	5* *Conical helical	6* *Arc	7* *Elemental	8* *Needle	9 Fines	10 Swarf, Sludge	11 Small Parts, Scrap
1.1 Long 	2.1 Long 	3.1 Flat 	4.1 Long 	5.1 Long 	6.1 Connected 					
1.2 Short 	2.2 Short 	3.2 Conical 	4.2 Short 	5.2 Short 	6.2 Loose 					
1.3 Snarled 	2.3 Snarled 		4.3 Snarled 	5.3 Snarled 						

OVERVIEW

- For nearly any machine that makes a chip, we can design a conveyor that fits. We design coolant filtration and coolant recycling systems with any of the pump options or features required to maintain a clean coolant system.
- The Hennig Chip-Disc Filtration (CDF) System can reach nominal filtration down to 25 microns, but we offer further filtration for through spindle, high-pressure systems such as cyclonic, cartridge, or bag filtration.
- If your conveyor system requires integration in machine controls or automation beyond our standard control system, we can build a tailor-made solution that does the job.
- If you're looking to further process your chips for shredding or recycling, we can integrate any of the technology required.
- We have a long history serving the machine tool industry, but we've made plenty of specialized conveyors that move finished parts, machined remnants, scrap materials, and other items beyond metal chips.
- We'll help you integrate all of the technology and controls you need to take chips and coolant management to a higher standard.

OPTIONS

STANDARD VFD OR PUSH-BUTTON CONTROL BOX

OVERHEAD TORQUE LIMITER

CUSTOM COOLANT TANKS & FILTRATION

Integrated or auxiliary

CUSTOM CHUTES

HEAVY-DUTY HARDENED RAILS AND CURVES

AIR KNIFE

For removing sticky chips from belt at the discharge end

WEAR RESISTANT BOTTOM FRAME

ON-SITE INSTALLATION

CASTERS

FEATURES

OVERLOAD/JAM PROTECTION

VARIABLE SPEED DRIVE

0.8 m/min - 3.3 m/min

PAINT

Textured grey, black (standard)

Custom colors as required

INCLINE ANGLE

60° / 45° (standard)

Custom angles as required

LOW PROFILE DESIGN



CHIP CONVEYORS

HINGE BELT (LINK, CHAIN)

A proven conveyor solution for a variety of materials, chip types, and chip loads. Hinge belts, the most common conveyor type, can be modified to handle more troublesome waste like tough scrap and heavy parts.

OPTIONS

Belt Design: Plain, perforated, dimpled, combo

Belt Pitches, in (mm): 1.5 (38.1), 2.5 (63.0)

Cleats: Serrated, flat, inverted "v", custom

Integrated Coolant Tank

Coolant Filtration

Heavy-duty Impact Plates: For heavy scrap or parts

Top Hat Cover: For bundled chips

Hinge Kit: Service and replacement parts (see pages 16-17)



SCRAPER BELT (DRAG, FLIGHT)

An ideal solution for fine chips and swarf, the scraper belt moves in reverse, collecting and dragging chips up the incline to the discharge end. Standard scraper paddles can be customized with wipers to the application.

OPTIONS

Paddles: Standard or custom angle

Wipers

Integrated Coolant Tank

Coolant Filtration

Solid Drum Magnet: For floating, ferrous chips when using coolant

Wearing Resistant Construction: Hardened rails, curves, and bottom frame

Scraper Kit: Service and replacement parts (see pages 16-17)



CHIP CONVEYORS

MAGNETIC

Intended for ferrous material applications with chips (100 micron and above), small parts or scraps. Not ideal for swarf and sludge. Our closed oil system lubricates all internal parts automatically, resulting in no maintenance, no oil refills, no manually lubricating bearings or bushings.

FEATURES

Closed Oil System: Never needs to be refilled or maintained

Heavy Duty Die Springs: Keeps infeed sprocket and tail shaft adjusted properly

Sunflower Based Oil

High Temperature Resistance: Up to 82°C (180°F)



OPTIONS

Coolant Tanks

Part/Chip De-magnetizer

Dimpled Slider Bed: To prevent hydro-locking


PUSH-PULL BAR

Used to transport all kinds of fine dust and chips produced in large quantities. The push rod conveyor can be mounted on or under the floor depending on the application. This system is particularly suitable for production facilities with multiple conveyors (conveyor network), as each chip conveyor can feed into the push-pull rod system.

OPTIONS

Pre-filtration grid: for coolant removal

Wear plate: with hardened subframe

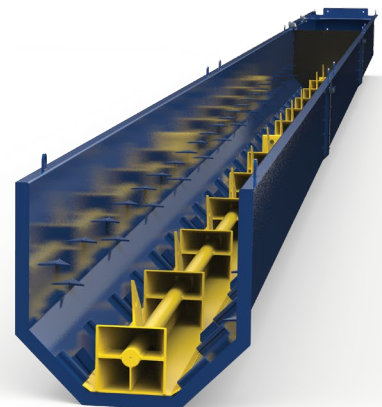

BELT TYPE

The universal transport solution for applications without liquids. The belt conveyor can be used to transport parts and scrap made of metal, plastic and cardboard weighing up to 15 kg/meter. It is used when extraction is difficult (pressure-formed parts, stamping scrap and cutting waste) or when a height difference has to be overcome. The conveyor belt is oil and grease resistant.

OPTIONS

PVC or PUR tape: for operating temperatures up to 80°C (176°F)


Special tape for high operating temperatures: more than 80°C (176°F)

With or without driver

Oil/grease resistant tapes

Integrated drive mechanism

Scraper

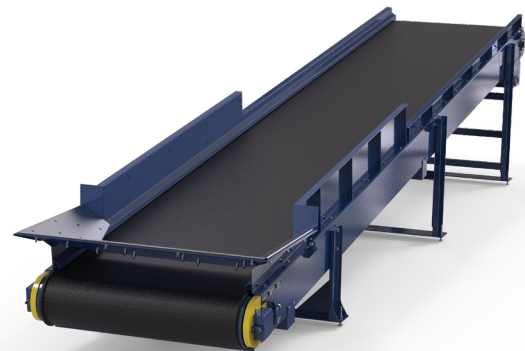

CHIP CONVEYORS

AUGER (SCREW)

Ideal for limited space applications, the auger system can be installed in the machine tool or directly into the foundation/slab. The addition of a mobile (transfer) conveyor can be used to roll around the shop and assist with chip removal from high production auger fed systems.

OPTIONS

Torque Limiter

Installation: In auger or directly in machine frame

Screw: Centerless auger (standard)

Mobile (Transfer) Setup: See below for details



MOBILE (AUGER-ASSISTING, PORTABLE)

The mobile conveyor provides machine operators with a convenient way to lift chips into full size barrel or hopper-high receptacles. It reduces machine clean-out effort and eliminates back related fatigue. The portable conveyor can be used for periodic clean-out of multiple machines or dedicated full time to any machine generating high volumes of chips. Position the conveyor under the chip chute of any auger chip flume, plug it in, and turn it on. Coolant that collects in the conveyor will be carried out by the chips so the conveyor never requires draining. Variable speed drive (VFD) is standard.


OPTIONS

Adjustable Chip Chute


The opening of the chip hopper may be oriented directly toward the tail section of the conveyor, to the right, or to the left, by unscrewing the four bolts holding the hopper in place, removing it, rotating it to the desired position and bolting it back in place.



ADJUSTABLE CHIP CHUTE ORIENTATION




A: Toward tail section



B: With APCQ



C: To Left



D: To Right

TURNKEY/NETWORK SYSTEMS

ENGINEERED FOR YOUR APPLICATION

Unique work environments. Specialized machine configurations. Varying chip volumes. These are just a few of the special requirements that indicate the need for a custom chip conveyor solution. Hennig engineers can create modified or special solutions to meet the needs of virtually any application; for example, dust and gas removal during dry machining, or part and scrap removal.

If your conveyor system requires integration in the machine controls or automation beyond our standard control system, we can build a tailor-made solution that does the job. If you're looking to further process your chips for shredding or recycling, we can integrate any of the technology required.

OPTIONS

Suction Device: For fumes, mist, and dust

Chip Shredder

Swarf Centrifuge

Swiveling Chutes: Manual or automated

Wearing Plate: With hardened bottom frame



Chip Compactor

Vibrating Table

Coolant Filtration

CONVEYOR NETWORKS

Fully automate the waste removal in your facility with integrated coolant tanks and conveyor networks. For high-volume manufacturers, Hennig's integrated systems can automate the removal of chips on one or all of the machine tools in the shop. This system allows the user to spend more time manufacturing and less time sweeping and moving chips.

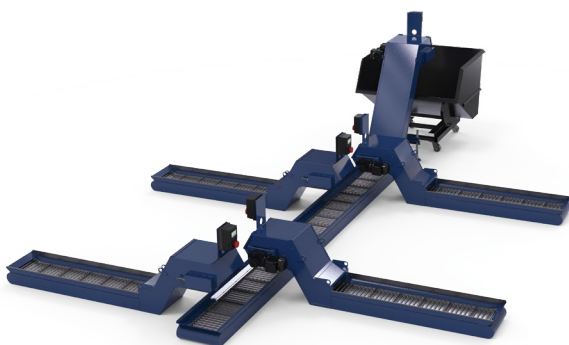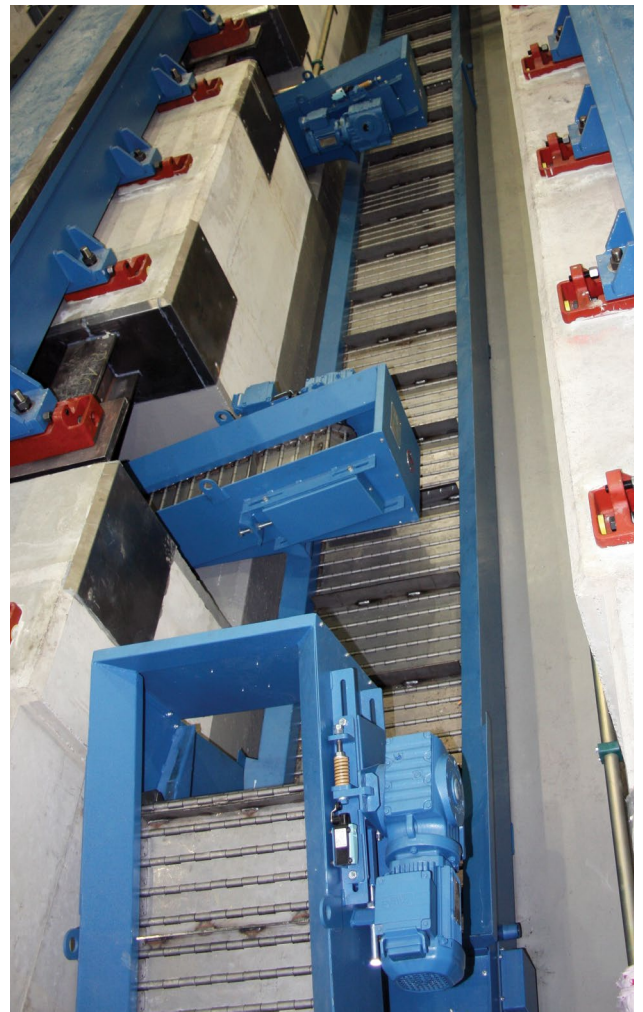

PUREFLOW

SELF-CLEANING FILTRATION SYSTEM

Designed for water based coolants, the PureFlow system equips machines requiring medium continuous filtration at 250 or 500 microns. PureFlow is easily implemented, working with existing coolant tanks supplied by OEMs.

FEATURES

Self-cleaning Filter Boxes: Ditch the filter bags with the self-cleaning filter box.


Stainless Steel Brushes: For cleaning the filter box

Works With: Hinge belt

OPTIONS

Filtration: 250 or 500 Microns

Air Knife

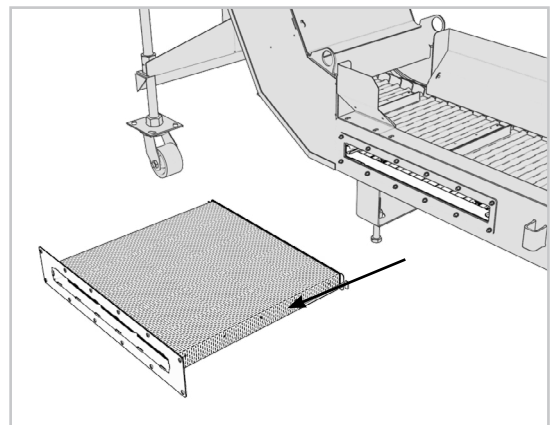

The filter box is easy to remove for quick and easy cleaning.



CHIP-DISC FILTRATION (CDF)

COOLANT MANAGEMENT. SIMPLIFIED.

The patented Chip Disc Filtration (CDF) technology achieves high levels of filtration without two separate belts. Our patented disc design provides a direct coolant flow path into the coolant reservoir and can filter a wide variety of materials, both in water—and oil—based coolant, down to 25 microns nominal.

This affordable, versatile approach to chip removal is Hennig-designed and patent-protected. It is the simplest approach to coolant filtration in the market today. The Hennig CDF system is simple by design, and can be used with scraper or hinge belt conveyors.

CAST IRON FILTRATION. MADE EASY.

For the notoriously difficult cast iron applications, the addition of a solid rotating magnetic drum can be incorporated for efficient removal of floating chips, fines, and sludge.

ONE BELT SYSTEM FOR ALL CHIP TYPES

Unlike many nylon mesh drum systems, CDF technology does not need two belt systems to handle stringy chips, and can be used with hinge or scraper belts.

CONTINUOUS SELF-CLEANING OPERATION

Continuous spraying of filtered coolant against the stainless steel media removes fines and chips. No outside source such as air or steam is used.

PATENTED DISC FILTRATION DESIGN

Hennig's innovative design provides a direct coolant flow path into the coolant tank reservoir, and filters a wide variety of materials both in water—and oil—based coolants.

STAINLESS STEEL MEDIA

Handles momentary or continuous heavy chip loads from 25-120 microns nominal, which can be a problem with nylon mesh, drum filters.

OPTIONS

Belt Type: Can be used with scraper belt or hinge belt

Filter Disc Diameter: 12" (305mm), 16" (406 mm)

Single or Multiple Discs: Depending on coolant flow rate

Solid Rotating Magnetic Drum: For collecting cast iron sludge/swarf


Cartridge, Cyclonic, or Bag Filters: For filtration down to 10 microns

Air Knife: For removing sticky chips from belt

Sludge Pot: For easy sludge/swarf disposal

FEATURES

1. Main Flood Coolant Pumps
2. High Pressure Pump: 300-1000 PSI (21-69 Bar)
3. Backwash CDF Pump
4. Disc Access Cover Panels
5. Coolant Tank
6. Control Box: Shown with HMI controls
7. Low Inlet Height
8. Additional Filtration As Needed:
Cartridge, Cyclonic, or Bag Filters

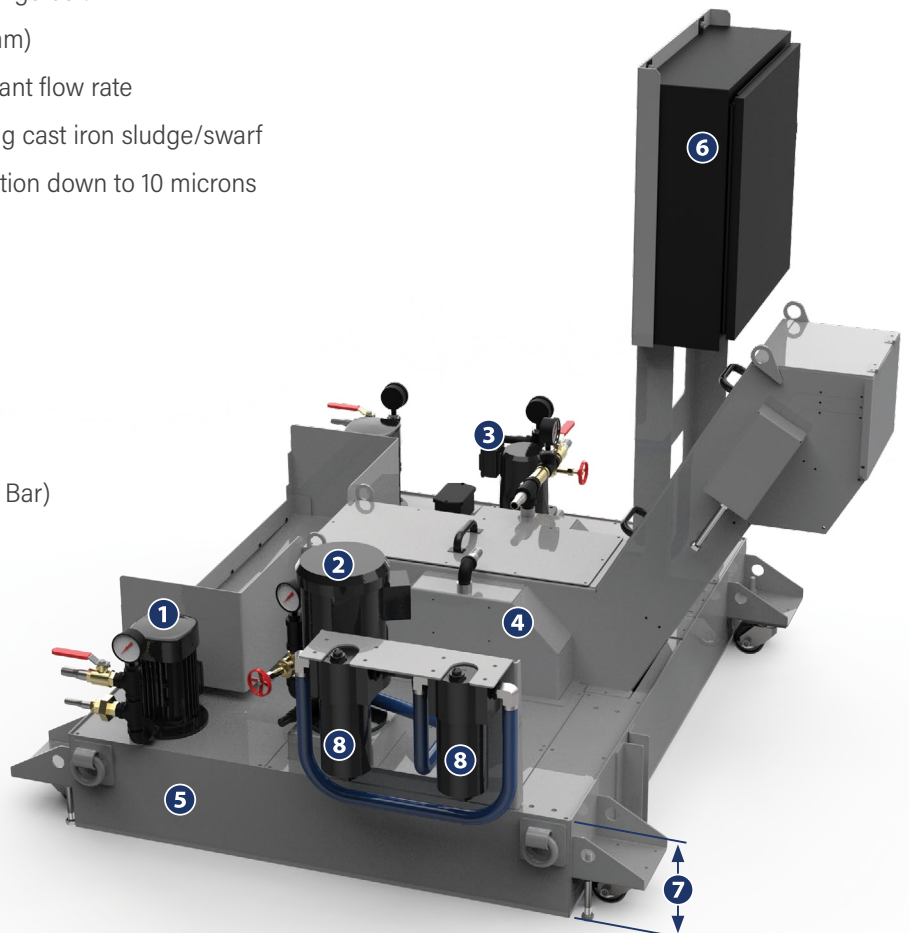

CHIP-DISC FILTRATION (CDF)


HOW IT WORKS

1 COARSE CHIP REMOVAL

With hinge or scraper belt

The belt (hinge or scraper) collects larger chips and particles for discharge into the chip hopper.

Removing coarse chips before they reach disc filter keeps them from bundling and jamming the system, which fosters extremely efficient fine particle filtration.

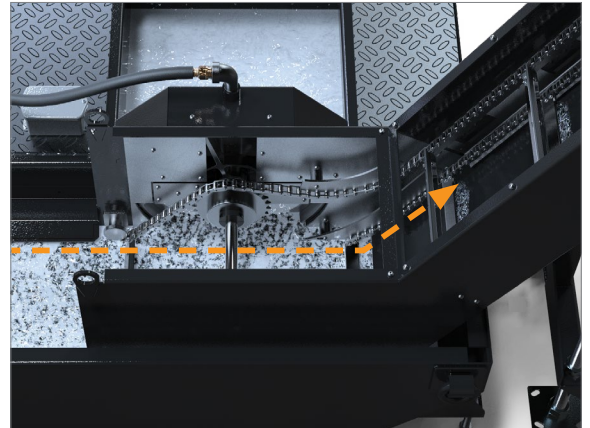


2 FINE PARTICLE FILTRATION

Filtering coolant

Small particles that escape the belt naturally migrate with the coolant flow to the rotating disc filter. There, particles down to 25 microns are collected and the cleaned coolant flows back into your tank.

Removing particles

The collected particles rotate with the disc filter and are lifted out of the coolant, towards the backwash spray. There, the particles are blasted onto the belt with a backwash spray and removed along with the coarse chips.

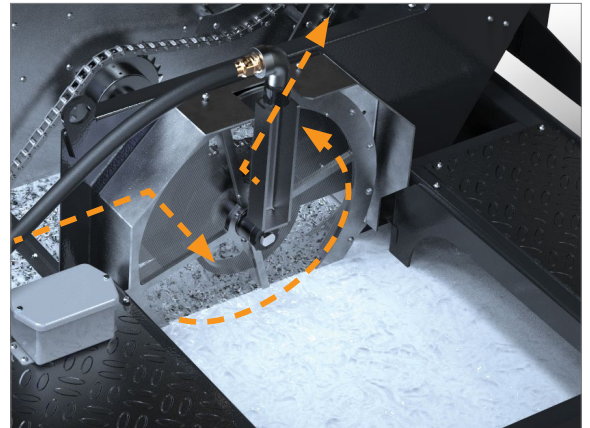


3 CAST IRON MICRO-FILTRATION

Collecting & discarding cast iron fines

If you're looking to filter cast iron fines, the addition of a solid rotating magnetic drum allows for cast iron fines to be collected and removed from the coolant.

When enough particles have collected on the magnetic drum to form a heavy sludge, the sludge drops onto the dry conveyor incline and is discarded along with the coarse chips and particles that have been collected on the disc filter into the chip hopper.

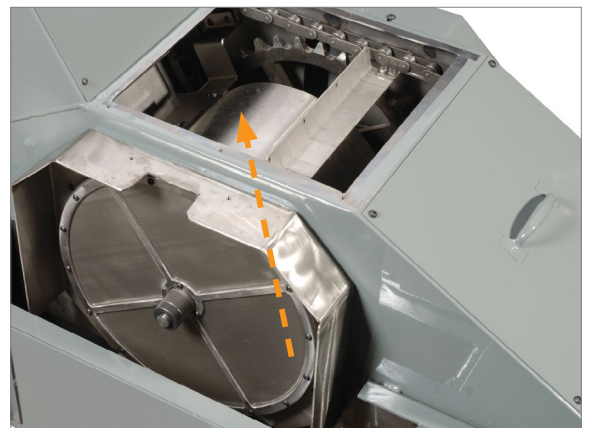

Magnetic drum for collecting cast iron fines

VARIFLOW: HIGH PRESSURE COOLANT SYSTEMS

DYNAMICALLY ADJUST THE FLOW OF COOLANT

All of the pressure, none of the stress.

The new VariFlow Gen4 high pressure coolant system offers top of the line performance in a small, economic package. Utilizing our Adaptive Flow Control, the VariFlow dynamically adjusts the flow of coolant to output the desired pressure that can be set from the VariFlow's HMI or the machine's RS-232 port. This variable flow system can reduce energy consumption, coolant foaming and heat generated from a pump running at a fixed flow. The new VariFlow Gen4 sets a new standard for high pressure coolant systems by bringing top of the line technology to a small platform that is priced similarly to the competitor's base models.

FEATURES

- Adaptive Flow Control (switch with the push of a button)
- 17.2 bar (250 PSI)
- 34.4 bar (500 PSI)
- 51.7 bar (750 PSI)
- 69 bar (1,000 PSI)
- Up to 3.8 L/min (8 GPM)
- Single Plug Electrical Interface
- 95 Liter Reservoir
- IOT Connectivity
- User Interface
- Caster Wheels
- 2 Year Warranty
- System Status Light



L	W	H
647.7 mm (25.5")	673.1 mm (26.5")	952.5 mm (37.5")



Easy access filter
10-micron bag filter



95 liter reservoir
With built-in, 10-micron filter




Control interface
Set pressure & view filter life



Status light
On (green)
Idle (blue)
Warning (red)



Built-in transfer pump
No external pump or wiring

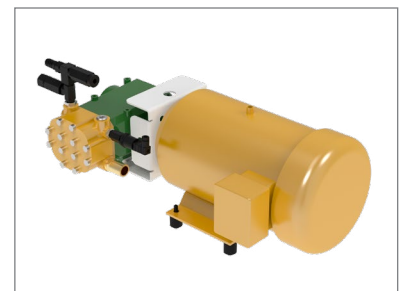

Direct drive pump
No belts
VFD driven motor
Smooth, quiet operation

INTEGRATED & AUXILIARY TANKS

CUSTOM ENGINEERED.

Using integrated or auxiliary tanks, coolant is quickly cleaned and recycled during the machining process, resulting in fewer interruptions and less downtime.

Our tanks are made from heavy gauge steel to provide leak-free service in harsh shop environments. Removable cover plates allow easy access to the tank's interior for quick, easy maintenance. Liquid level sight gages are a standard feature, and baffles, chip baskets, and removable screens can also be added.

OPTIONS

Auxiliary or Integrated Tanks

Removable Cover Plates

Liquid Level Gages

Baffles, Chip Baskets, Screens

Filters (Cartridge, Bag, Cyclonic)

Float Switches


Oil Skimmers

Coolant Pumps

Custom g/min or PSI Requirements

Integrated Controls:


For pump/filter automation

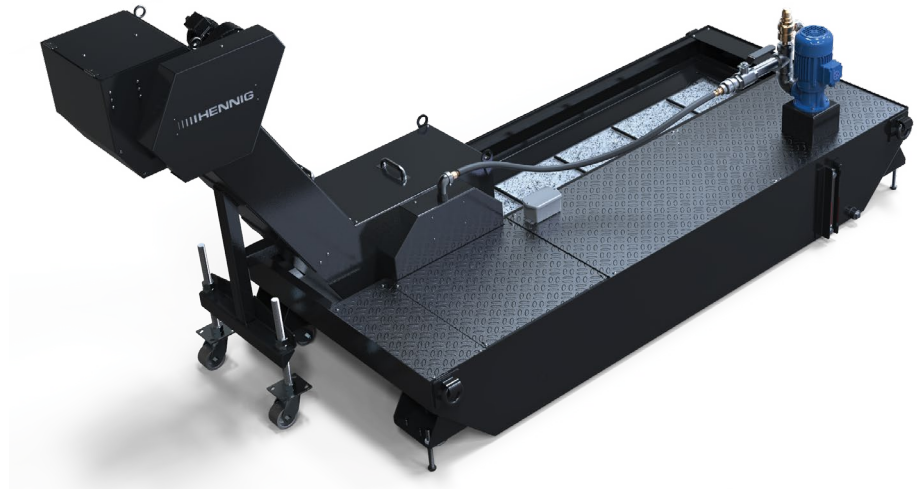


CDF conveyor with integrated coolant tank



T-shaped auxiliary coolant tank

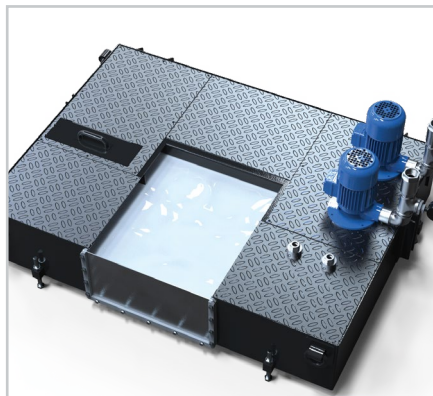

Square-shaped integrated coolant tank

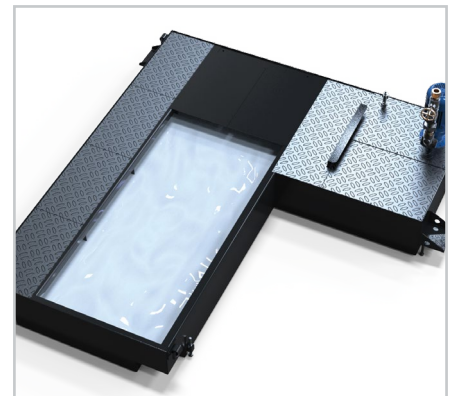

L-shaped auxiliary coolant tank

SPARE PARTS

When your conveyor needs service or repair, we have parts in stock to get your conveyor up and running, as well as the skilled personnel to repair or replace the damaged or worn parts. Conveyor belts, drive motors, and other parts can get damaged, worn, or just get old. Before investing in an entirely new system, check with us to see if your existing system can be repaired.

To order spare parts, simply provide us with the Hennig No., Serial No., and Customer No. found on your conveyor tag, and the parts you need to replace from the list below.

Look for this tag on your conveyor system for the reference numbers.

The tag is typically found on either side of the discharge head.




CONVEYOR PARTS		BELTS & BELT KITS
1. Front Chain Guard	12. Drive Chain	25. Hinge Belt (whole belt replacement)
2. Torque Limiter Assembly	13. Flip Lid	17** Hinge Kit (standard)
3. Inside Chain Guard	14. Gear Motor Sprocket	18** Hinge Kit (with plain cleat)
4. Take-Up Bearing	15. Gear Motor	19** Hinge Kit (with serrated cleat)
5. Belt Sprocket	16. Adjustable Supports	26. Scraper Belt (whole belt replacement)
6. LH Inner Guard	20* Rail Knobs/Idler Shaft Assembly	27. Scraper Blade Kit
7. RH Inner Guard	22. Control Box (VFD)	28. Poly Scraper Blade Kit
8. Torque Limiter Key/Direct Drive Key	21. Motor Bracket	
9. Belt Sprocket Key	23. Motor Cover	
10. Drive Shaft	24. Caster Assembly (option)	
11. Bearing Cover		

* Our conveyors use either rail knobs or an idler shaft assembly. If you're not sure which one your system has, contact us with the Hennig Part No. and we'll let you know which setup your system uses.

** Hinge kits come complete with the hinge plate—with plain or serrated cleat if required (x1), shaft (x2), slip fit link connector (x2), slip fit link (x2), side plate/wing (x2), cotter pins (x4), and washers (x4). Items are not sold separately.



BELTS & BELT KITS

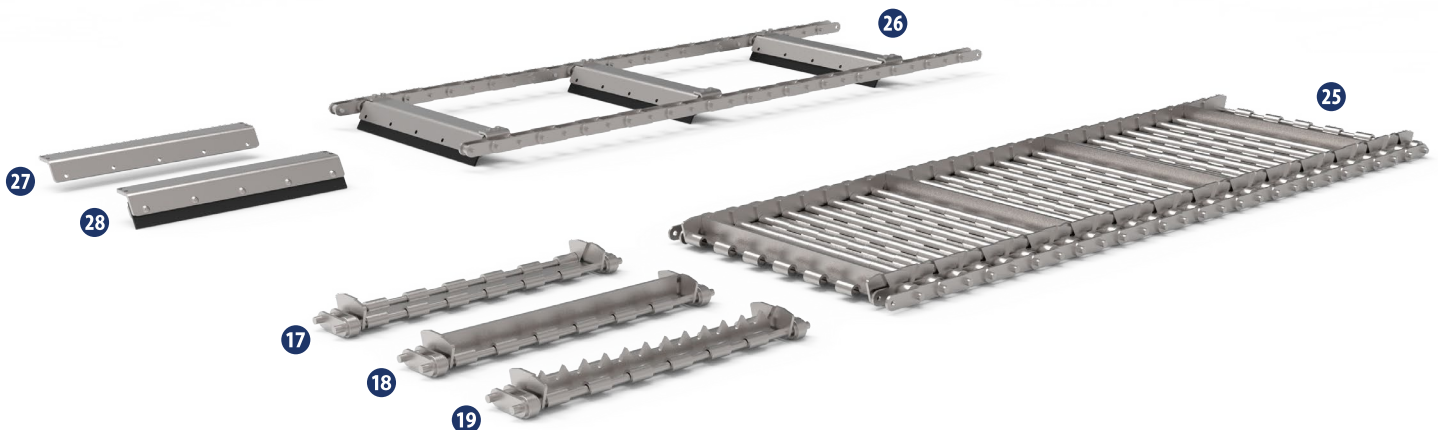

OVERHEAD CHAIN DRIVE



DIRECT DRIVE



QUOTE REQUEST (HINGE, SCRAPER, MAGNETIC)

Please complete this form and email to vertrieb@hennig-gmbh.de. ***Required fields**

COMPANY

*Company Name _____

*Company Address _____

*Name _____

*Title _____

*E-mail _____

Phone _____

EXISTING CONVEYOR

(If you have the conveyor part number, disregard the sections below)

*Brand ☐ Hennig ☐ Enomoto ☐ Hennig-France (Sermeto) ☐ Cobsen ☐ Other _____

*Part # _____

*Serial # _____

*Belt Type ☐ Hinge (☐ Plain ☐ Perf ☐ Dimple) ☐ Scraper ☐ Magnetic

MACHINE INFORMATION

*Make _____

*Model _____

*Type ☐ Lathe ☐ Milling ☐ Drilling ☐ Tapping ☐ Other _____ *Chip Volume _____ in³/min

Spindle Horse Power _____ kW (hp) *Available Power ☐ 440 ☐ 220 ☐ 110 ☐ 24 VDC ☐ Other _____

*Chip Material ☐ Soft Steel ☐ Hard Steel ☐ Stainless Steel ☐ Brass/Copper ☐ Cast Iron ☐ Aluminum ☐ Cast Aluminum

☐ Other _____

*Kind of Chips ☐ Fine ☐ Broken ☐ Large Broken ☐ Lg Bushy ☐ Tight Bushy

*Available References ☐ Photos ☐ Drawings

CONVEYOR TECHNICAL DATA

*UOM ☐ inch ☐ mm

*L1 Intake Length _____

*L Max Length _____

*H Discharge Height _____

*W Max Width _____

*A Angle (45°, 60°) _____

*W1 Width of Chip Chute _____

*H1 Height of Chip Chute _____

*H2 (1.5" pitch belt) 120 mm

*H2 (2.5" pitch belt) 200 mm

*B Belt Width _____

Foot Location (Distance) ☐ B ☐ C (_____)

Casters ☐ Yes ☐ No

*Coolant Tank Required ☐ Yes ☐ No (If yes, also complete form on page 20)

*Coolant Flow Rate _____ gal/min (total machine)

*Coolant Slots ☐ Left ☐ Right ☐ Both ☐ None

*Conveyor Speed (m/min) ☐ 2.2 ☐ 1.6 ☐ Other _____

*Overload Protection ☐ Current Sensor (standard) ☐ Mech. Torque Limiter

☐ None ☐ Other _____

*Installed Location ☐ On Floor ☐ Inside Machine ☐ Inside Pit ☐ Inside Tank

*Motor Location ☐ Left ☐ Right

*Power Requirements V _____ Ph _____ hz _____

*Control Box ☐ Yes ☐ No (if yes, select type below)

☐ Variable Speed (standard) ☐ 3 Button Box (fwd, rev, e-stop)

☐ Auto/Mechanical Selector Switch


☐ Electrical Plug (If selected, please specify) _____

*Control Box Location ☐ Top Front ☐ Top Left ☐ Top Right ☐ Left Side


☐ Right Side ☐ Stand Alone

Paint (texture powder coated) ☐ Grey Texture ☐ Black Texture


☐ Other _____



INLET CROSS SECTION

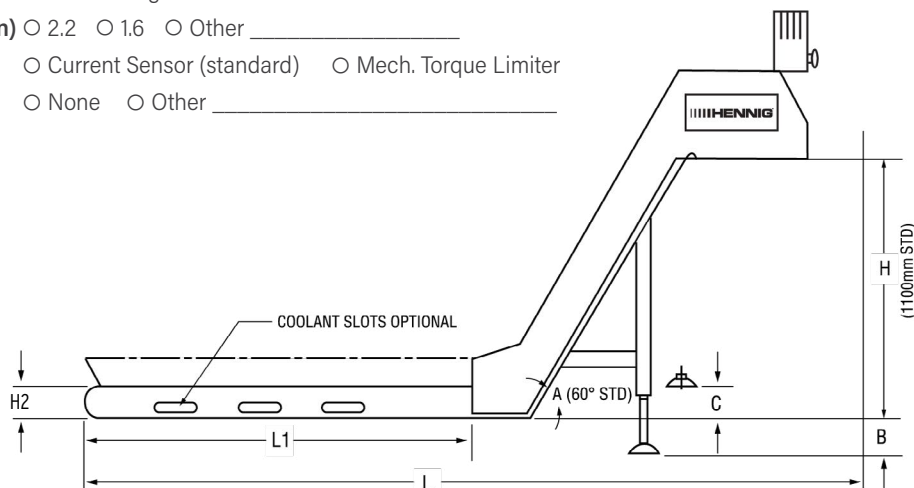

LEFT SIDE PROFILE VIEW

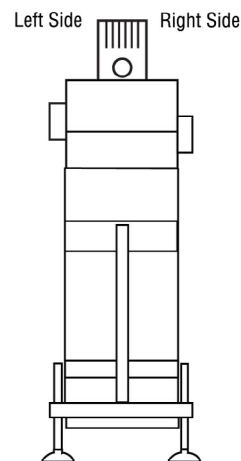

FRONT VIEW

QUOTE REQUEST (CDF)

Please complete this form and email to vertrieb@hennig-gmbh.de. ***Required fields**

COMPANY

*Company Name _____

*Company Address _____

*Name _____

*Title _____

*E-mail _____

Phone _____

EXISTING CONVEYOR (If you have the conveyor part number, disregard the sections below)

*Brand ☐ Hennig ☐ Enomoto ☐ Hennig-France (Sermeto) ☐ Cobsen ☐ Other _____

*Part # _____

*Serial # _____

*Belt Type ☐ Hinge (☐ Plain ☐ Perf ☐ Dimple) ☐ Scraper ☐ Magnetic

MACHINE INFORMATION

*Make _____

*Model _____

*Type ☐ Lathe ☐ Milling ☐ Drilling ☐ Tapping ☐ Other _____ *Chip Volume _____ in³/min

Spindle Horse Power _____ kW (hp) *Available Power ☐ 440 ☐ 220 ☐ 110 ☐ 24 VDC ☐ Other _____

Chip Material ☐ Soft Steel ☐ Hard Steel ☐ Stainless Steel ☐ Brass/Copper ☐ Cast Iron ☐ Aluminum ☐ Cast Aluminum

☐ Other _____

*Kind of Chips ☐ Fine ☐ Broken ☐ Large Broken ☐ Lg Bushy ☐ Tight Bushy

*Available References ☐ Photos ☐ Drawings

CONVEYOR TECHNICAL DATA

*UOM ☐ inch ☐ mm

*L1 Intake Length _____

*L Max Length _____

*H Discharge Height _____

*W Max Width _____

*A Angle (45°, 60°) _____

*W1 Width of Chip Chute _____

*H1 Height of Chip Chute _____

*H2 (1.5" pitch belt) 120 mm

*H2 (2.5" pitch belt) 200 mm

*B Belt Width _____

Foot Location (Distance) ☐ B ☐ C (_____)

Casters ☐ Yes ☐ No

*Coolant Tank Required ☐ Yes ☐ No (If yes, also complete form on page 20)

*Coolant Flow Rate _____ gal/min (total machine)

*Coolant Type ☐ Water Soluble ☐ Synthetic ☐ Oil ____ssu ☐ Other _____

*Filtration Level (microns) ☐ 25-30 ☐ 35-40 ☐ 40-45 ☐ Other _____

*Conveyor Speed (m/min) ☐ 2.2 ☐ 1.6 ☐ Other _____

*Overload Protection ☐ Current Sensor (standard) ☐ Mech. Torque Limiter
☐ None ☐ Other _____

*Installed Location ☐ On Floor ☐ Inside Machine ☐ Inside Pit ☐ Inside Tank

*Motor Location ☐ Left ☐ Right

*Power Requirements V _____ Ph _____ hz _____

*Control Box ☐ Yes ☐ No (if yes, select type below)

☐ Variable Speed (standard) ☐ 3 Button Box (fwd, rev, e-stop)

☐ Auto/Mechanical Selector Switch


☐ Electrical Plug (If selected, please specify) _____

*Control Box Location ☐ Top Front ☐ Top Left ☐ Top Right ☐ Left Side


☐ Right Side ☐ Stand Alone

Paint (texture powder coated) ☐ Grey Texture ☐ Black Texture


☐ Other _____



INLET CROSS SECTION

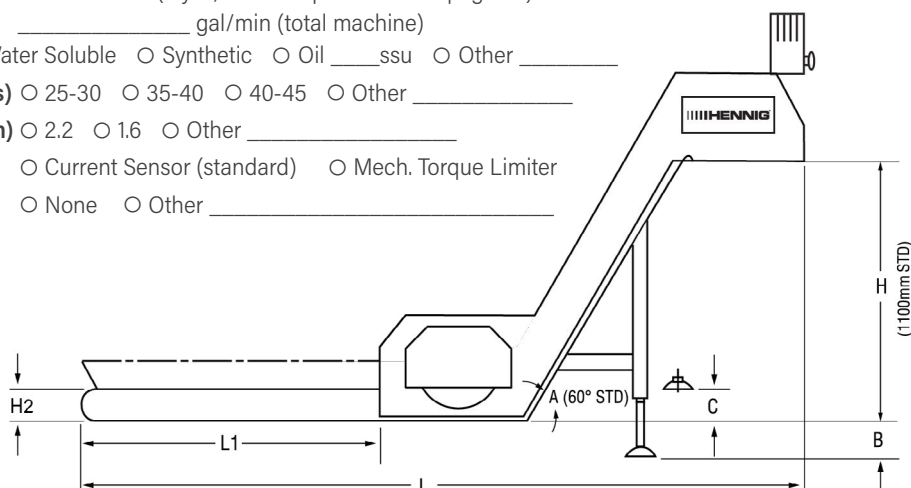

LEFT SIDE PROFILE VIEW

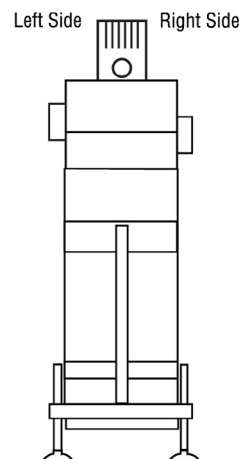

FRONT VIEW

QUOTE REQUEST (AUGER)

Please complete this form and email to vertrieb@hennig-gmbh.de. ***Required fields**

COMPANY

*Company Name _____

*Company Address _____

*Name _____

*Title _____

*E-mail _____

Phone _____

MACHINE INFORMATION

*Make _____

*Model _____

*Type ☐ Lathe ☐ Milling ☐ Drilling ☐ Tapping ☐ Other _____ *Chip Volume _____ in³/min

AUGER DETAILS

*UOM ☐ inch ☐ mm

*1 End-to-End Length _____

*2 Spiral Outside Diameter _____


*3 Pitch _____

*4 Spiral Metal Thickness _____

*5 Drive Shaft Diameter _____

*Direction ☐ Right Hand ☐ Left Hand

Additional Information _____

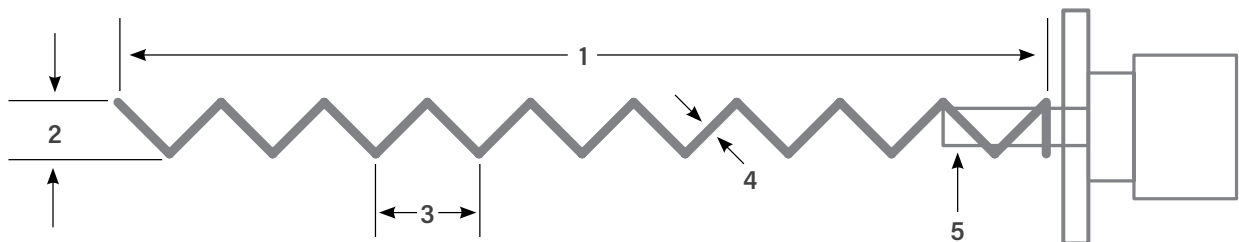

*MOUNTING TYPE



☐ **A** (Internal hub bored to driveshaft, secured with bolt or set screw)



☐ **B** (Slip connection that fits tightly onto driveshaft, connected with a pin)



☐ **C** (Combination of A and B)



☐ **D** (Spiral only, to be welded directly onto driveshaft)

QUOTE REQUEST (COOLANT TANKS)

Please complete this form and email to vertrieb@hennig-gmbh.de. ***Required fields**

COMPANY

*Company Name _____

*Company Address _____

*Name _____

*Title _____

*E-mail _____

Phone _____

MACHINE INFORMATION

*Make _____

*Model _____

*Type ☐ Lathe ☐ Milling ☐ Drilling ☐ Tapping ☐ Other _____

*Available References ☐ Photos ☐ Drawings

COOLANT TANK DETAILS

*UOM ☐ inch ☐ mm

*Tank Shape ☐ Square/Rectangle ☐ L Shape ☐ T Shape
☐ Other _____

*L _____ *W _____

*L1 _____ *W1 _____

*L2 _____ *H _____

*Tank Mounting ☐ On Floor ☐ In Pit ☐ Other _____

Tank Options ☐ Casters ☐ Leveling Bolts ☐ Inspection Cover
☐ Removable Screen(s) ☐ Other _____

Paint (texture powder coated) ☐ Grey Texture ☐ Black Texture
☐ Other _____

*Pump 1 ☐ None ☐ Model _____
Flow Rate _____ Pressure _____ Voltage _____

*Pump 2 ☐ None ☐ Model _____
Flow Rate _____ Pressure _____ Voltage _____

*Pump 3 ☐ None ☐ Model _____
Flow Rate _____ Pressure _____ Voltage _____

*Filter ☐ Single Canister Bag ☐ Dual Canister Bag ☐ Cyclonic

*Required Filtration Level (microns) _____




*Float Switch ☐ High Level ☐ Low Level
☐ High & Low Level ☐ None

*Oil Skimmer ☐ Yes ☐ No

*Coolant Capacity (liter) _____

*Coolant Flow Rate (liter/min total machine) _____

Additional Options/Information _____

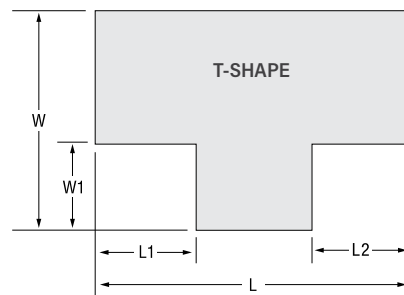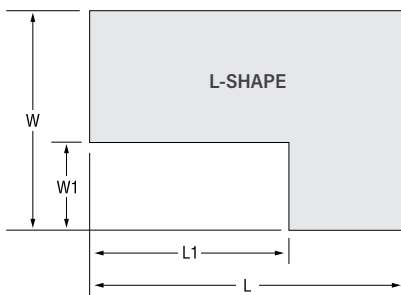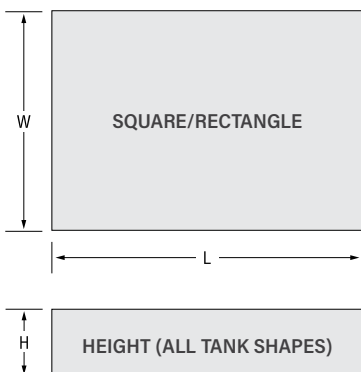

FACILITIES & CONTACTS



- Headquarters / Manufacturing / Distribution / Service Center
- Manufacturing / Distribution / Service Center
- Manufacturing / Distribution
- Sales Partner
- Service Center

1 Hennig, Inc. Global Headquarters

9900 North Alpine Road
Machesney Park, IL 61115
T: +1 815-636-9900
F: +1 815-636-1988
info@hennig-inc.com

2 Hennig, Inc. Oklahoma Service Center

900395 S. 3420 Road
Chandler, OK 74834
T: +1 405-258-6702
F: +1 405-258-9971
info@hennig-inc.com

3 Hennig, Inc. Michigan Service Center

11879 Brookfield Road
Livonia, MI 48150
T: +1 734-523-8274
F: +1 855-427-1549
info@hennig-inc.com

4 Cobsen Ltda.

R. Benedito Mazulquim, 425
18550-000 Boituva CEP, Brazil
T: +55 15 3263-4042
F: +55 15 3263-4070
cobsen@cobsen.com.br

5 Hennig GmbH European Headquarters

Überrheinerstraße 5
85551 Kirchheim, Germany
T: +49 89 96096-0
F: +49 89 96096-120
info@hennig-gmbh.de

6 Hennig CZ s.r.o.

Klánovická 334
250 82 Úvaly, Czech Republic
T: +420 2810 91610
F: +420 2810 91625
info@hennig-cz.com

7 Hennig France sas


19, rue de Rebrillon
03300 Creuzier-le-Neuf, France
T: +33 470 58 4740
F: +33 470 58 0022
contact@hennig-france.com

8 Hennig U.K. Ltd.

Unit 6, Challenge Close
Coventry CV1 5JG, United Kingdom
T: +44 24 76555690
F: +44 24 76256591
sales@henniguk.com

9 Hennig BH doo.

Ciljuge II bb – poslovna zona
75270 Zivinice, Bosnia Herzegovina
T: +387 35 95 1876
kontakt@hennig-bh.com

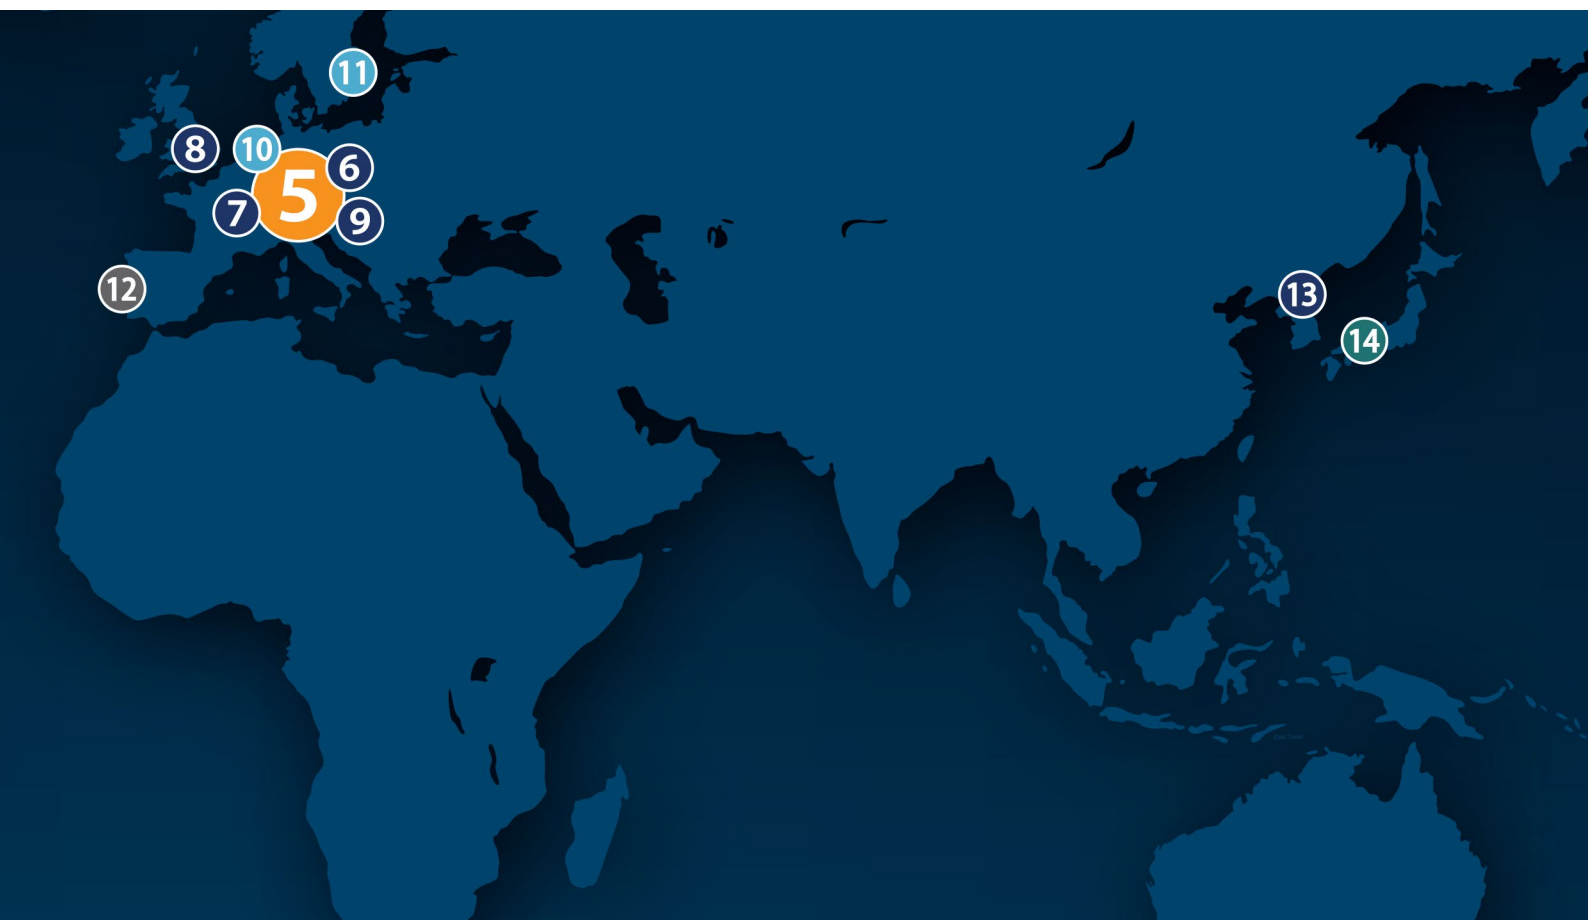

10 B & S Industrieel Onderhoud
Zirkoonstraat 7, 7554 TT Hengelo (Ov.)
Postbus 69
7550 AB Hengelo (Ov.), Netherlands
T: +31 74 8510600
F: +31 74 8510605
hinders@bs.nl

11 Svenska Maskinkomponenter AB
Brunnsäkersvägen 9
64593 Strängnäs, Sweden
T: +46 8 53470770
F: +46 8 53470775
info@svemako.se

12 Hennig Portugal Unipessoal Lda
Rua de Lages 386
4575-300 Paredes-Penafiel, Portugal
T: +49 172 6429207
a.dasilvaduarte@hennig-gmbh.de

13 Osung Mechatronics Co. Ltd.
Jinbuk-myun Shincon-li 413-2
Gyungnam Masan-city, South Korea
T: +82 55 271 1821
F: +82 55 271 1820
osgijeon@naver.com

14 Enomoto BeA Co., Ltd.
5-10 Sohara Koa-Cho
Kakamigahara-Shi,
Gifu 504-8551, Japan
T: +81 583 832178
F: +81 583 897435
kashida@enomotoweb.com

|||| HENNIG®

PROTECT YOUR SUCCESS

WE'VE GOT YOUR BACK

Hennig Worldwide has been a global leader since 1950, specializing in chip and coolant management, machine protection, and facility safety. We work with a wide variety of manufacturers and other facilities worldwide, helping them create and maintain safe and efficient workplaces. Our commitment to excellence extends beyond our services—we actively contribute to local communities, create regional jobs, and support the global needs of machine tool customers.



Überrheinerstrasse 5
85551 Kirchheim, Germany
+49 89 96096-0

hennigworldwide.com

CF_GmbH_english_0525